




Cylindrical bore




Tapered bore

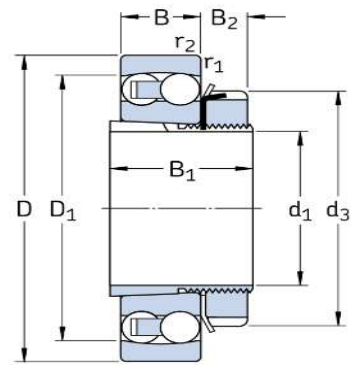


نام محصول	قطر داخل	قطر بیرون	ارتفاع	وزن	نرخ بار	نرخ بار	حد بار	نرخ	باتاقان
	d	D	B		دینامیکی	استاتیکی	خستگی		
	mm	mm	mm	kg	(C)	(C0)	(Pu)	r/min	مربوطه
1200	10	30	9	0.034	5.53	1.18	0.061	36000	---
2200	10	30	14	0.048	5.53	1.18	0.06	17000	---
1201	12	32	10	0.04	6.24	1.43	0.072	32000	---
2201	12	32	14	0.053	8.52	1.9	0.098	30000	---
1301	12	37	12	0.067	9.36	2.16	0.12	28000	---
2301	12	37	17	0.095	11.7	2.7	0.14	28000	---
1202	15	35	11	0.049	7.41	1.76	0.09	28000	---
2202	15	35	14	0.058	7.41	1.76	0.09	14000	---
1302	15	42	13	0.094	10.8	2.6	0.14	24000	---
2302	15	42	17	0.11	10.8	2.6	0.14	12000	---
1203	17	40	12	0.073	8.84	2.2	0.12	24000	---
2203	17	40	16	0.088	10.6	2.55	0.14	24000	---
1303	17	47	14	0.12	12.7	3.4	0.18	20000	---
1204 K+H 204	17	47	14	0.16	12.7	3.4	0.18	20000	---
2303	17	47	19	0.16	14.6	3.55	0.19	22000	---
1204	20	47	14	0.12	12.7	3.4	0.18	20000	---
2204	20	47	18	0.14	16.8	4.15	0.22	20000	---
11204	20	47	40	0.18	12.7	3.4	0.18	9000	---
1304	20	52	15	0.16	14.3	4	0.21	18000	---
1205 K+H 205	20	52	15	0.21	14.3	4	0.21	18000	---
2205 K+H 305	20	52	18	0.23	16.8	4.4	0.23	18000	SNL505
2304	20	52	21	0.21	14.3	4	0.21	9000	---
1305 K+H 305	20	62	17	0.33	19	5.4	0.28	15000	SNL605
1205	25	52	15	0.14	14.3	4	0.21	18000	SNL205
2205	25	52	18	0.16	14.3	4	0.21	9000	SNL205
11205	25	52	44	0.22	14.3	4	0.21	8000	---
1206 K+H 206	25	62	16	0.32	15.6	4.65	0.24	15000	SNL506
1305	25	62	17	0.26	19	5.4	0.28	15000	SNL305
2206 K+H 306	25	62	20	0.36	23.8	6.7	0.35	15000	SNL506
2305	25	62	24	0.34	19	5.4	0.28	7500	SNL305
1306 K+H 306	25	72	19	0.49	22.5	6.8	0.36	13000	SNL606
2306 K+H 2306	25	72	27	0.61	31.2	8.8	0.45	13000	SNL606
1206	30	62	16	0.22	15.6	4.65	0.24	15000	SNL206

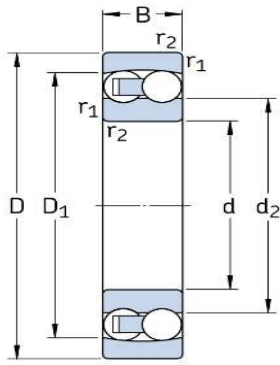


Cylindrical bore




Tapered bore

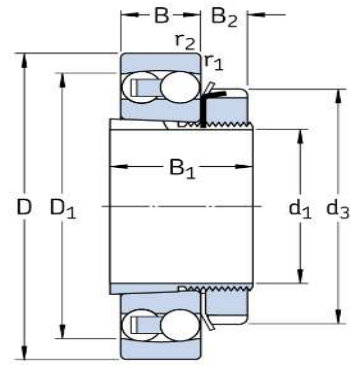


2206	30	62	20	0.26	15.6	4.65	0.24	7500	SNL206
11206	30	62	48	0.35	15.6	4.65	0.24	6700	---
1207 K+H 207	30	72	17	0.44	19	6	0.31	13000	SNL507
1306	30	72	19	0.39	22.5	6.8	0.36	13000	SNL306
2207 K+H 307	30	72	23	0.54	30.7	8.8	0.46	12000	SNL507
2306	30	72	27	0.51	22.5	6.8	0.36	6700	SNL306
1307 K+H 307	30	80	21	0.65	26.5	8.5	0.43	11000	SNL607
2307 K+H 2307	30	80	31	0.84	39.7	11.2	0.59	12000	SNL607
1207	35	72	17	0.32	19	6	0.31	13000	SNL207
2207	35	72	23	0.41	19	6	0.31	6300	SNL207
11207	35	72	52	0.54	15.9	5.1	0.27	5600	---
1208 K+H 208	35	80	18	0.58	19.9	6.95	0.36	11000	SNL508
1307	35	80	21	0.51	26.5	8.5	0.43	11000	SNL307
2208 K+H 308	35	80	23	0.58	31.9	10	0.51	11000	SNL508
2307	35	80	31	0.7	26.5	8.5	0.43	5600	SNL307
1308 K+H 308	35	90	23	0.85	33.8	11.2	0.57	9500	SNL608
2308 K+H 2308	35	90	33	1.1	54	16	0.82	10000	SNL608
1208	40	80	18	0.42	19.9	6.95	0.36	11000	SNL208
2208	40	80	23	0.5	19.9	6.95	0.36	5600	SNL208
11208	40	80	56	0.72	19	6.55	0.34	5000	---
1209 K+H 209	40	85	19	0.68	22.9	7.8	0.4	11000	SNL509
2209 K+H 309	40	85	23	0.78	32.5	10.6	0.54	10000	SNL509
1308	40	90	23	0.68	33.8	11.2	0.57	9500	SNL308
2308	40	90	33	0.96	33.8	11.2	0.57	5000	SNL308
1309 K+H 309	40	100	25	1.2	39	13.4	0.7	8500	SNL609
2309 K+H 2309	40	100	36	1.4	63.7	19.3	1	9000	SNL609
1209	45	85	19	0.47	22.9	7.8	0.4	11000	SNL209
2209	45	85	23	0.53	22.9	7.8	0.4	5300	SNL209
11209	45	85	58	0.77	21.6	7.35	0.38	4500	---
1210 K+H 210	45	90	20	0.77	26.5	9.15	0.48	10000	SNL510
2210 K+H 310	45	90	23	0.87	33.8	11.2	0.57	9500	SNL510
1309	45	100	25	0.96	39	13.4	0.7	8500	SNL309
2309	45	100	36	1.3	39	13.4	0.7	4500	SNL309
1310 K+H 310	45	110	27	1.45	43.6	14	0.72	8000	SNL610
2310 K+H 2310	45	110	40	1.9	63.7	20	1.04	9500	SNL610
1210	50	90	20	0.53	26.5	9.15	0.48	10000	SNL210
2210	50	90	23	0.57	22.9	8.15	0.42	4800	SNL210

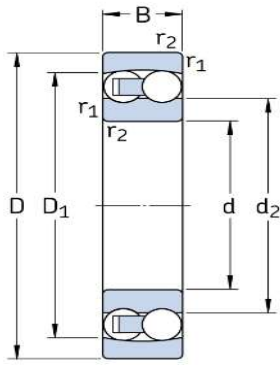


Cylindrical bore




Tapered bore

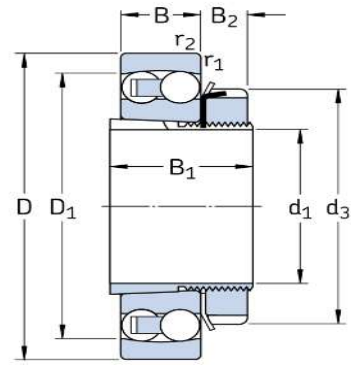


11210	50	90	58	0.85	22.9	8.15	0.42	4300	---
1211 K+H 211	50	100	21	0.99	27.6	10.6	0.54	9000	SNL511
2211 K+H 311	50	100	25	1.15	39	13.4	0.7	8500	SNL511
1310	50	110	27	1.2	43.6	14	0.72	8000	SNL310
2310	50	110	40	1.65	43.6	14	0.72	4000	SNL310
1311 K+H 311	50	120	29	1.9	50.7	18	0.92	7500	SNL611
2311 K+H 2311	50	120	43	2.4	76.1	24	1.25	7500	SNL611
1211	55	100	21	0.71	27.6	10.6	0.54	9000	SNL211
2211	55	100	25	0.79	27.6	10.6	0.54	4300	SNL211
1212 K+H 212	55	110	22	1.2	31.2	12.2	0.62	8500	SNL512
2212 K+H 312	55	110	28	1.45	48.8	17	0.88	8000	SNL512
1311	55	120	29	1.6	50.7	18	0.92	7500	SNL311
2311	55	120	43	2.1	76.1	24	1.25	7500	SNL311
1312 K+H 312	55	130	31	2.15	58.5	22	1.12	6300	SNL612
2312 K+H 2312	55	130	46	2.95	87.1	28.5	1.46	7000	SNL612
1212	60	110	22	0.9	31.2	12.2	0.62	8500	SNL212
2212	60	110	28	1.05	31.2	12.2	0.62	3800	SNL212
11212	60	110	62	1.15	30.2	11.6	0.6	3400	---
1213 K+H 213	60	120	23	1.45	35.1	14	0.72	7000	SNL513
2213 K+H 313	60	120	31	1.8	57.2	20	1.02	7000	SNL513
1312	60	130	31	1.95	58.5	22	1.12	6300	SNL312
2312	60	130	46	2.6	87.1	28.5	1.46	7000	SNL312
1313 K+H 313	60	140	33	2.85	65	25.5	1.25	6000	SNL613
2313 K+H 2313	60	140	48	3.6	95.6	32.5	1.66	6300	SNL613
1213	65	120	23	1.15	35.1	14	0.72	7000	SNL213
2213	65	120	31	1.4	35.1	14	0.72	3600	SNL213
1215 K+H 215	65	130	25	2	39	15.6	0.8	6700	SNL515
2215 K+H 315	65	130	31	2.3	58.5	22	1.12	6300	SNL515
1313	65	140	33	2.45	65	25.5	1.25	6000	SNL313
2313	65	140	48	3.25	95.6	32.5	1.66	6300	SNL313
1315 K+H 315	65	160	37	4.2	79.3	30	1.43	5600	SNL615
2315 K+H 2315	65	160	55	5.55	124	43	2.04	5600	SNL615
1214	70	125	24	1.25	35.8	14.6	0.75	7000	---
2214	70	125	31	1.45	35.8	14.6	0.75	3400	---
1216 K+H 216	70	140	26	2.4	39.7	17	0.83	6000	SNL516
2216 K+H 316	70	140	33	2.85	65	25.5	1.25	6000	SNL516
1314	70	150	35	3	74.1	27.5	1.34	6000	SNL314

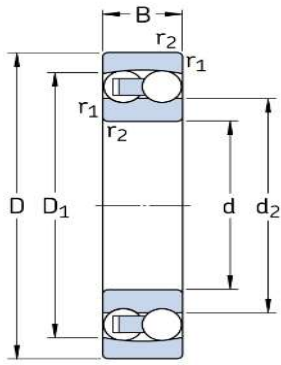

Cylindrical bore



Tapered bore

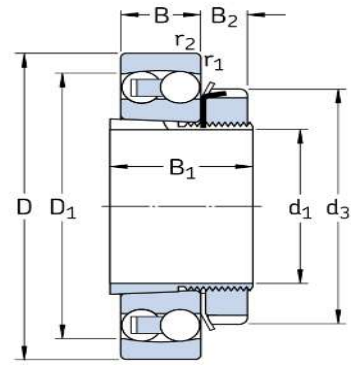

2314	70	150	51	3.9	111	37.5	1.86	6000	SNL314
1316 K+H 316	70	170	39	5	88.4	33.5	1.5	5300	SNL616
2316 K+H 2316	70	170	58	7.1	135	49	2.24	5300	SNL616
1215	75	130	25	1.35	39	15.6	0.8	6700	SNL215
2215	75	130	31	1.6	58.5	22	1.12	6300	SNL215
1217 K+H 217	75	150	28	2.95	48.8	20.8	0.98	5600	SNL517
1315	75	160	37	3.55	79.3	30	1.43	5600	SNL315
2315	75	160	55	4.7	124	43	2.04	5600	SNL315
1216	80	140	26	1.65	39.7	17	0.83	6000	SNL216
2216	80	140	33	2	65	25.5	1.25	6000	SNL216
1218 K+H 218	80	160	30	3.5	57.2	23.6	1.08	5300	SNL518
1316	80	170	39	4.2	88.4	33.5	1.5	5300	SNL316
2316	80	170	58	6.1	135	49	2.24	5300	SNL316
1217	85	150	28	2.05	48.8	20.8	0.98	5600	SNL217
1219 K+H 219	85	170	32	4.25	63.7	27	1.2	5000	SNL519
1317	85	180	41	5	97.5	38	1.7	4800	SNL317
1218	90	160	30	2.5	57.2	23.6	1.08	5300	SNL218
1220 K+H 220	90	180	34	5	68.9	30	1.29	4800	SNL520
1318	90	190	43	5.8	117	44	1.93	4500	SNL318
1219	95	170	32	3.1	63.7	27	1.2	5000	---
1319	95	200	45	6.7	133	51	2.16	4300	SNL319
1220	100	180	34	3.7	68.9	30	1.29	4800	SNL220
1320	100	215	47	8.3	143	57	2.36	4000	SNL320
13030	150	225	56	7.5	57.2	23.6	0.88	3400	---
13036	180	280	74	16	95.6	40	1.34	2800	---
13940	200	280	60	10.7	60.5	29	0.97	2600	---
13944	220	300	60	11	60.5	30.5	0.97	2400	---
13948	240	320	60	11.3	60.5	32	0.98	2200	---