


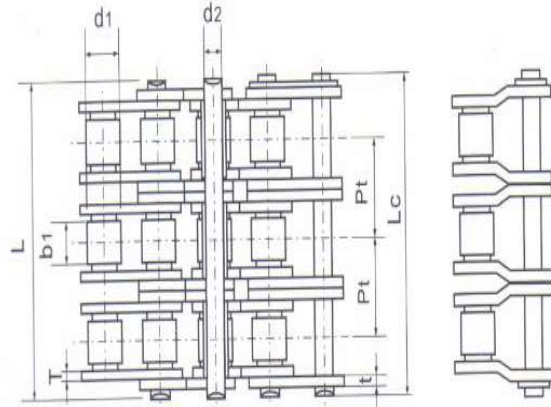
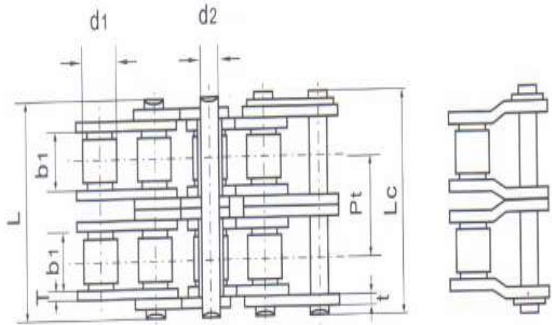


شماره زنجیر	شماره زنجیر ISO	گام p	d1	b1	d2	h2	pt	L	Lc	مقاومت کششی	وزن (kg/m)
15-1	03C	4.7625	2.48	2.38	1.62	4.3	—	6.1	6.9	1.8	0.08
25-1	04C	6.35	3.30	3.18	2.3	6	—	7.8	8.4	3.5	0.15
25-2							6.4	14.5	15	7	0.28
35-1	06C	9.525	5.08	4.77	3.58	9	—	12.4	13.2	7.9	0.33
35-2							10.13	22.5	23.3	15.8	0.63
35-3							10.13	32.7	33.5	23.7	1.05
41-1	085	12.7	7.77	6.25	3.58	9.91	—	13.75	15	6.67	0.41
40-1	08A	12.7	7.95	7.85	3.96	12.07	—	16.6	17.8	14.1	0.62
40-2							14.38	31	32.2	28.2	1.12
40-3							14.38	45.4	46.6	42.3	1.9
50-1	10A	15.875	10.16	9.4	5.08	15.09	—	20.7	22.2	22.2	1.02
50-2							18.11	38.9	40.4	44.4	2
50-3							18.11	57	58.5	66.6	3.09
60-1	12A	19.05	11.91	12.57	5.94	18.08	—	25.9	27.7	31.8	1.5
60-2							22.78	48.8	50.5	63.6	2.92
60-3							22.78	71.5	73.3	95.4	4.54
80-1	16A	25.4	15.88	15.75	7.92	24.13	—	32.7	35	56.7	2.6
80-2							29.29	62.7	64.3	113.4	5.15
80-3							29.29	91.7	93.6	170.1	7.89
100-1	20A	31.75	19.05	18.9	9.53	30.18	—	40.4	44.7	88.5	3.91
100-2							35.76	76.4	80.5	177	7.8
100-3							35.76	112.2	116.3	265.5	11.77
120-1	24A	38.1	22.23	25.22	11.1	36.2	—	50.3	54.3	127	5.62
120-2							45.44	95.8	99.7	254	11.7
120-3							45.44	141.4	145.2	381	17.53

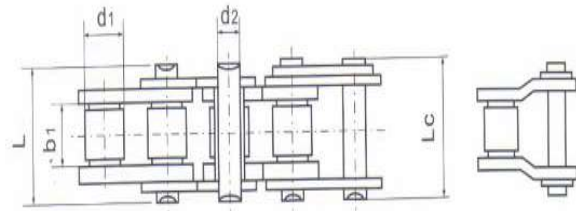

140-1							—	54.4	59	172	7.5
140-2	28A	44.45	25.4	25.22	12.7	42.24	48.87	103.3	107.9	344	15.14
140-3								152.2	156.8	517.2	22.2
160-1							—	64.8	69.6	226.8	10.1
160-2	32A	50.8	28.58	31.55	14.27	48.26	58.55	123.3	128.1	453.6	20.14
160-3								181.8	186.6	680.4	30.02
180-1							—	72.8	78.6	280.2	13.45
180-2	36A	57.15	35.71	35.48	17.46	54.31	65.84	138.6	144.4	560.5	29.22
180-3								204.4	210.2	840.7	38.22
200-1							—	80.3	87.2	353.8	16.15
200-2	40A	63.5	39.68	37.85	19.85	60.33	71.55	151.9	158.8	707.6	32.24
200-3								223.5	230.4	1061.40	49.03
240-1							—	95.5	103	510.3	23.2
240-2	48A	76.2	47.63	47.35	23.81	72.39	87.83	183.4	190.8	1020.60	45.23
240-3								271.3	278.6	1530.90	71.6

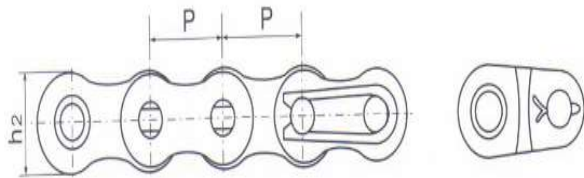

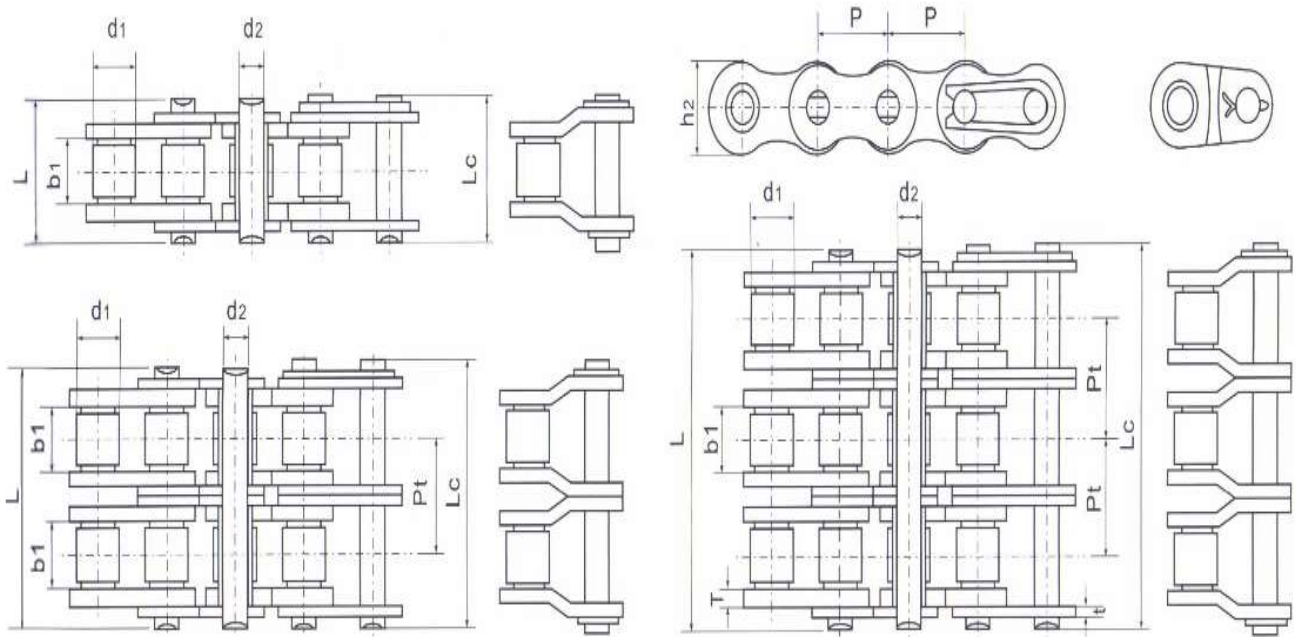

24B-1									53.4	57.8	160	7.1
24B-2	38.1	25.4	25.4	14.63	4.8	6	33.2	48.36	101.7	106.2	280	13.4
24B-3									150.1	154.6	425	20.1
28B-1									65.1	69.5	200	8.5
28B-2	44.45	27.94	30.99	15.9	6	7.5	36.7	59.56	124.6	129.1	360	16.6
28B-3									184.2	188.7	530	24.92
32B-1									66	71	250	10.25
32B-2	50.8	29.21	30.99	17.81	6	7	42	58.55	124.6	129.6	450	21
32B-3									183.2	188.2	670	31.56
40B-1									82.2	89.2	355	16.35
40B-2	63.5	39.37	38.1	22.89	8	8.5	52.96	72.29	154.5	161.5	630	32
40B-3									226.8	233.8	950	48.1
48B-1									99.1	107	560	25
48B-2	76.2	48.26	45.72	29.24	10	12	63.8	91.21	190.4	198.2	1000	50
48B-3									281.6	289.4	1500	75
56B-1									114.6	123	850	35.78
56B-2	88.9	53.98	53.34	34.32	12	13.5	77.8	106.6	221.2	229.6	1600	71.48
56B-3									327.8	336.2	2240	107.2
64B-1									130	138.5	1120	46
64B-2	101.6	63.5	60.96	39.4	13	15	90.17	119.9	249.9	258.4	2000	91
64B-3									369.8	378.3	3000	136
72B-1									130	138.5	1400	60.8
72B-2	114.3	72.39	68.58	44.48	15	17	103.6	136.3	283.7	292.7	2500	120.4
72B-3									420	429	3750	180