



A design

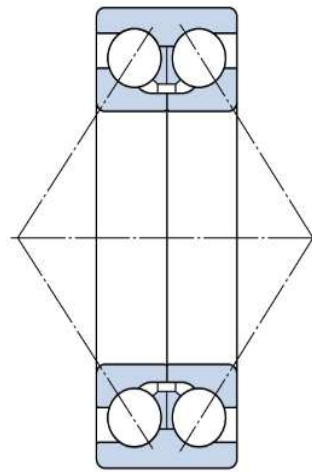


33 D

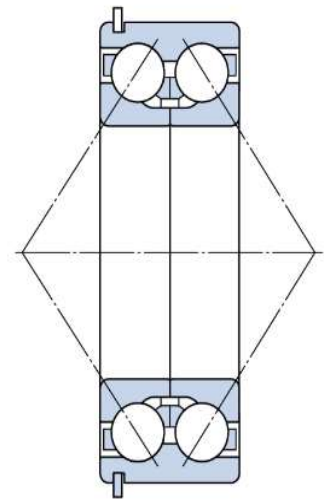


33 DNRCBM<sup>1)</sup>


نام محصول	قطر داخل	قطر بیرون	ارتفاع	وزن	نرخ بار	نرخ بار	حد بار	نرخ
	d	D	B		دینامیکی	استاتیکی	خستگی	
	mm	mm	mm	kg	(C)	(C0)	(Pu)	r/min
3200 A	10	30	14	0.051	7.61	4.3	0.183	17000
3201 A	12	32	15.9	0.058	10.1	5.6	0.24	15000
3202 A	15	35	15.9	0.066	11.2	6.8	0.285	14000
3302 A	15	42	19	0.13	15.1	9.3	0.4	12000
3203 A	17	40	17.5	0.1	14.3	8.8	0.365	12000
3303 A	17	47	22.2	0.18	21.6	12.7	0.54	11000
3204 A	20	47	20.6	0.16	20	12	0.51	14000
3304 A	20	52	22.2	0.22	23.6	14.6	0.62	13000
3205 A	25	52	20.6	0.18	21.6	14.3	0.6	12000
3305 A	25	62	25.4	0.35	32	20.4	0.865	11000
3206 A	30	62	23.8	0.29	30	20.4	0.865	10000
3306 A	30	72	30.2	0.53	41.5	27.5	1.16	9000
3207 A	35	72	27	0.44	40	28	1.18	9000
3307 A	35	80	34.9	0.71	52	35.5	1.5	8500
3208 A	40	80	30.2	0.58	47.5	34	1.43	8000
3308 A	40	90	36.5	1.05	64	44	1.86	7500
3209 A	45	85	30.2	0.63	51	39	1.63	7500
3309 A	45	100	39.7	1.4	75	53	2.24	6700
3210 A	50	90	30.2	0.66	51	39	1.66	7000

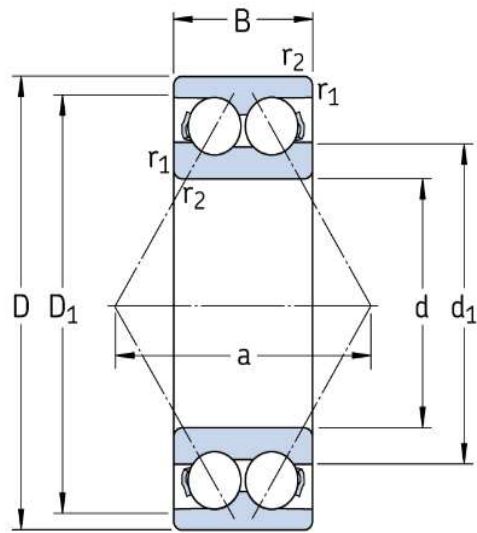

A design

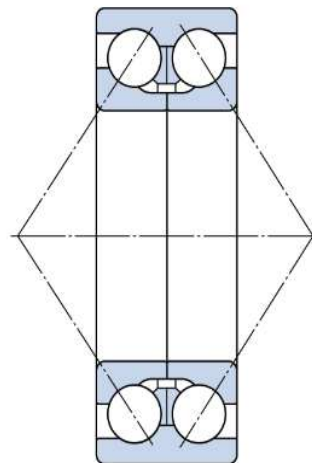

33 D

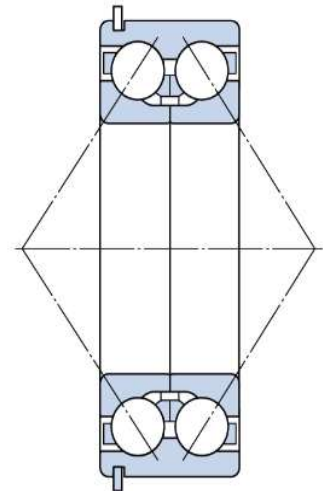

33 DNRCBM<sup>1)</sup>

3310 A	50	110	44.4	1.95	90	64	2.75	6000
3211 A	55	100	33.3	1.05	60	47.5	2	6300
3311 A	55	120	49.2	2.55	112	81.5	3.45	5300
3212 A	60	110	36.5	1.4	73.5	58.5	2.5	5600
3312 A	60	130	54	3.25	127	95	4.05	5000
3213 A	65	120	38.1	1.75	80.6	73.5	3.1	4800
3313 A	65	140	58.7	4.1	146	110	4.55	4500
3214 A	70	125	39.7	1.9	88.4	80	3.4	4500
3314 A	70	150	63.5	5.05	163	125	5	4300
3215 A	75	130	41.3	2.1	95.6	88	3.75	4500
3315 A	75	160	68.3	5.55	176	140	5.5	4000
3216 A	80	140	44.4	2.65	106	95	3.9	4300
3316 A	80	170	68.3	6.8	182	156	6	3600
3217 A	85	150	49.2	3.4	124	110	4.4	3800
3317 A	85	180	73	8.3	195	176	6.55	3400
3218 A	90	160	52.4	4.15	130	120	4.55	3600
3318 A	90	190	73	9.25	195	180	6.4	3200
3219 A	95	170	55.6	5	159	146	5.4	3400
3319 A	95	200	77.8	11	225	216	7.5	3000
3220 A	100	180	60.3	6.1	178	166	6	3200
3320 A	100	215	82.6	13.5	255	255	8.65	2800
3222 A	110	200	69.8	8.8	212	212	7.2	2800
3322 A	110	240	92.1	19	291	305	9.8	2600